

**Yamato**

# CF SERIES

Flat bed 3 Needle Interlock Stitch Machine

**Yamato's CF series strongly help you to win success from the most crucial competition at quality, cost, and delivery.**



**Yamato**

# CF SERIES

Flat bed 3 Needle Interlock Stitch Machine

## ■ Numbering on Model:

### CF2303M-156M/FC



- ① Symbol of Series    ② Class No.    ③ Number of Needle : 3 = 2, 3 needle    ④ Submodel by Application
- ⑤ Top Cover Thread Mechanism : 1 = with Top Cover Thread Mechanism
- ⑥ Needle Distance : 56=5.6mm    ⑦ Shape of Stitch Tongue on Stitch Plate    ⑧ Device(s)

## ■ Specification

Model	Application	Needle	Bob	Needle Distance	Stitch Length	Stitch Width	Stitch Density	Stitch Length	Stitch Width	Stitch Density
<b>CF2300M</b>	For Decorative Seam etc. LSa-1/605	UY129GAS 3 (2)	5 (4)	4.8 5.6 6.4	1.4 - 3.6			6	31	5500
<b>CF2303M</b>	For Binding BSb-1/605	UY129GAS 3 (2)	5 (4)	3.2 4.0 4.8 5.6 6.4	1.4 - 3.6	Thumbs up icon	10.7 - 1.2	5	31	5500
<b>CF2339M</b>	For Attaching Lace LSa-1/605	UY129GAS 3 (2)	5 (4)	4.0 4.8 5.6	1.4 - 3.6			4	31	5000

**!** Specification and appearance on this catalog are subject to change without notice. For correct handling of products described on this catalog, please read instructions carefully before operation.

### YAMATO SEWING MACHINE (NINGBO) CO., LTD.

TEL: +86-574-86800518, 86800558/FAX: +86-574-86800555/E-mail: marketing@yamato-china.com  
 YAMATO SEWING MACHINE MFG. CO., LTD. (HEAD OFFICE) TEL: +81-8-6384-5821/FAX: +88-8-6384-7185/E-mail: export-dept@yamato-sewing.com  
 YAMATO U.S.A. INC. TEL: +1-803-548-0334/FAX: +1-803-548-0405  
 YAMATO EUROPE GmbH. TEL: +49-40-355347-0/FAX: +49-40-354371/E-mail: sales@yamato.de  
 YAMATO (HONG KONG) CO., LTD. TEL: +852-2721-0251/FAX: +852-2723-0444/E-mail: yamato@yamato-sewing.com.hk  
 雅美特(香港)有限公司 东莞代表处 TEL: +86-769-86231363/FAX: +86-769-86231362  
 大和縫紉機製造株式會社 青島事務所 TEL: +86-532-85783175/FAX: +86-532-85783172  
 大和縫紉機製造株式會社 上海事務所 TEL: +86-21-84400017, 84400019/FAX: +86-21-84400021  
 YAMATO SINGAPORE PTE LTD. TEL: +65-6287-1955/FAX: +65-6287-1028/E-mail: sales@yamato-sewing.com.sg  
 YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, TIRUPUR MAIN BRANCH TEL: +91-421-4333701/FAX: +91-421-4333702/E-mail: yamato-sewing@airtelbroadband.in  
 YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, DELHI BRANCH TEL: +91-11-41603280/FAX: +91-11-40574681  
 YAMATO SINGAPORE PTE LTD, CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA FAX: +62-21-781-8727  
 YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE TEL: +88-02-899-1864/FAX: +88-02-899-1865  
 YAMATO MEXICO OFFICE TEL: +52-55-5784-9090/FAX: +52-55-5578-1470  
 THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY TEL: +84-8-62966067/FAX: +84-8-38113384



# Yamato's CF series strongly help you to win success from the most crucial competition at quality, cost, and delivery.

## There is no problem in sewing with synthetic fiber thread.

HR Device (Silicone supplying unit for needle point) and SP Device (Silicone supplying unit for needle thread) to avoid thread breakage and skip stitch are equipped as standard.



## Offering ideal seam.

Yamato's seam is high in elasticity and strong in durability. The oil can stay clean with a filter, which is easy to replace. You can enjoy high quality finish.



## Keeping out the small dust.



## Easy threading.

Threading for looper thread can be easily done by swinging up thread take-up eyelet.



## Easy way to prevent skip stitching.

Fine adjustment of Looper locus according to needle size can be done easily.



## Pushbutton stitch length regulator.

Stitch length is freely adjustable with pushbutton system. The pushbutton can also be locked to prevent the set stitch length from being changed against your will.





## Solving oil leakage.

New oil seal prevents oil from leaking at needle bar area.



## Lever-adjustable differential feed.

Differential ratio according to materials can be adjusted by pushing a lever up and down. Differential lever can be adjusted even while the machine is running. The lever is completely covered at the time of sewing so that smooth flow of fabric is obtained.

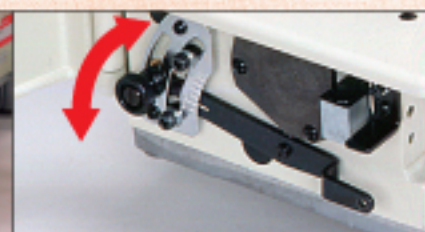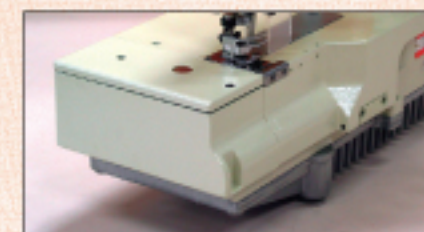

## Ready-to use package and easy handling(CF2300M).

In addition to newly designed covers with which operators can set their hands closer to needle dropping point, user friendly fabric guides are included for good quality finish in hemming and covering.

