

# Yamato®

# LG SERIES

1 Needle Lock Stitch Plain Zigzag Sewing Machine, for "Soft Stitch".

## Yamato LG's "Soft Stitch"

– enhanced finish in both appearance and function –  
is your best partner for making good quality intimate garments.



ISO9001:2008  
JQA-QM6412

# Yamato®

# LG SERIES

1 Needle Lock Stitch Plain Zigzag Sewing Machine, for "Soft Stitch".




### Numbering on Model:


LG2205-L W/UT-18/TB

① ② ③ ④ ⑤

- ① Symbol of Series:
- ② Submodel by Application:  
21\*\* = without Thread Trimmer Mechanism  
22\*\* = with Thread Trimmer Mechanism
- ③ Applicable Fabric Weight:  
L = for Light Weight Fabrics  
M = for Medium Weight Fabrics
- ④ Indication W:  
W = for "Soft Stitch"
- ⑤ Device:  
UT-15 = Automatic Under Thread Trimmer  
UT-18 = Automatic Under Thread Trimmer, with Anti Bird's Nest Function  
TB = Back Tacker

### Specifications

Model	LG2105-LW, MW LG2205-LW	LG2125-LW, MW LG2225-LW	LG2135-LW, MW LG2235-LW
Stitch Pattern	wide plain zigzag stitch 	narrow plain zigzag stitch 	3 step zigzag stitch 
Machine Speed	5000 spm	5000 spm	5000 spm
Max. Stitch Length	1.3 mm (LW) 5.0 mm (MW)	2.0 mm (LW) 4.2 mm (MW)	1.3 mm (LW) 2.5 mm (MW)
Max. Stitch Bite	8.0 mm	5.0 mm	8.0 mm
Foot Lift	6.2 mm (2105) 5.6 mm (2205)	6.2 mm (2125) 5.6 mm (2225)	6.2 mm (2135) 5.6 mm (2235)
Needle Bar Stroke	33.4 mm	33.4 mm	33.4 mm
Application	for zig-zag seaming in general	Attaching lace, making shoulder straps, etc.	Elastic seaming on lady's foundation etc.



**YAMATO SEWING MACHINE MFG. CO., LTD.**  
http://www.yamato-sewing.com

**HEAD OFFICE**  
4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN  
TEL: +81-6-6364-8621 / FAX: +81-6-6364-7185 / E-mail: export-dept@yamato-sewing.com

YAMATO U.S.A. INC. TEL: +1-803-548-0334 / FAX: +1-803-548-0405

YAMATO EUROPE GmbH TEL: +49-40-355347-0 / FAX: +49-40-354371 / E-mail: sales@yamato.de

YAMATO (HONG KONG) CO., LTD. TEL: +852-2721-0251 / FAX: +852-2723-0444 / E-mail: yamato@yamato-sewing.com.hk

群演機(香港)有限公司 香港代表處 TEL: +86-769-88231363 / FAX: +86-769-88231362

大和縫紉機(寧波)有限公司 TEL: +86-574-86800518, 86800558 / FAX: +86-574-86800555 / E-mail: marketing@yamato-china.com

大和縫紉機製造株式會社 青島事務所 TEL: +86-532-85783175 / FAX: +86-532-85783172

大和縫紉機製造株式會社 上海事務所 TEL: +86-21-64400017, 64400019 / FAX: +86-21-64400021

YAMATO SINGAPORE PTE LTD. TEL: +65-6287-1955 / FAX: +65-6287-1028 / E-mail: sales@yamato-sewing.com.sg

YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, TIRUPUR MAIN BRANCH TEL: +91-421-4333701 / FAX: +91-421-4333702 / E-mail: yamato-sewing@airtelbroadband.in

YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, DELHI BRANCH TEL: +91-11-41603280 / FAX: +91-11-41603281


YAMATO SINGAPORE PTE LTD, CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA Fax: +62-21-781-8727

YAMATO MEXICO OFFICE TEL: +52-55-5784-9090 / FAX: +52-55-5578-1470

THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY TEL: +84-8-82968057 / FAX: +84-8-38113384


**With its high basic machine performance and practical components, Yamato LG strongly helps you make a difference in manufacturing high quality intimate garments.**

■ **High stitch performance - achieving real "Soft Stitch"**  
Well-balanced seam minimizes tunnel and puckering, even on soft and lightweight fabric and make your garments more beautiful to look at and more comfortable to wear.

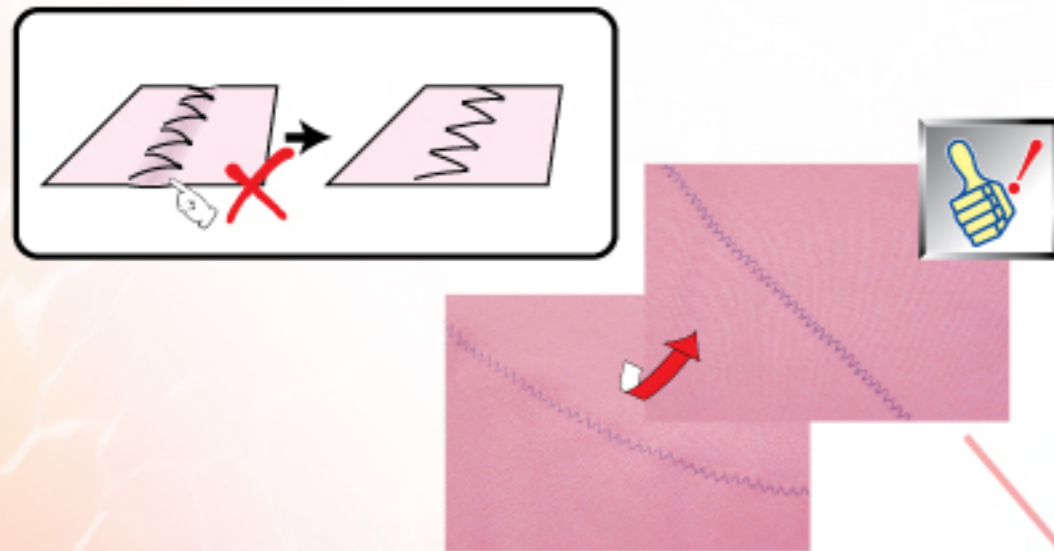

■ **High machine performance - reducing operators' fatigues in use**  
Yamato's precise manufacturing technology, based on long experience in high speed sewing machine production, enables smooth machine run. This feature helps stress-free operation for stable finishing quality.

● **TB**  
Back Tacker (Solenoid Type)

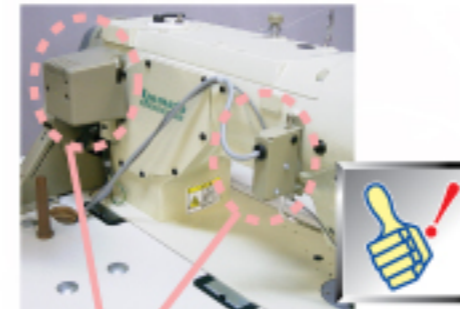

● **AEF-31**  
Compact Type Clamp System Automatic Tape Feeder



● **UT-18**  
Automatic Under Thread Trimmer, with "Anti-Bird's Nest" Function

UT-18 device is Automatic Under Thread Trimmer, which also prevent bird's nest at the beginning of sewing for clean finish.



● **TL**  
Compact Spotlight (Optional)

