


Yamato®

VC1700-8 class


2-3 Needles Cylinder Bed Interlock Stitch Machine

Non-Stain Technology and wide variety of sewing condition gives you high quality!!

Tightened

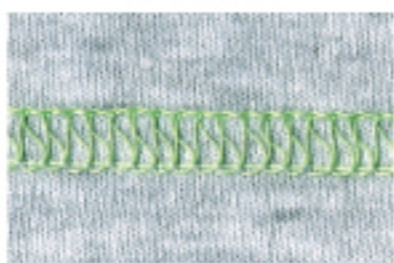

Loosened

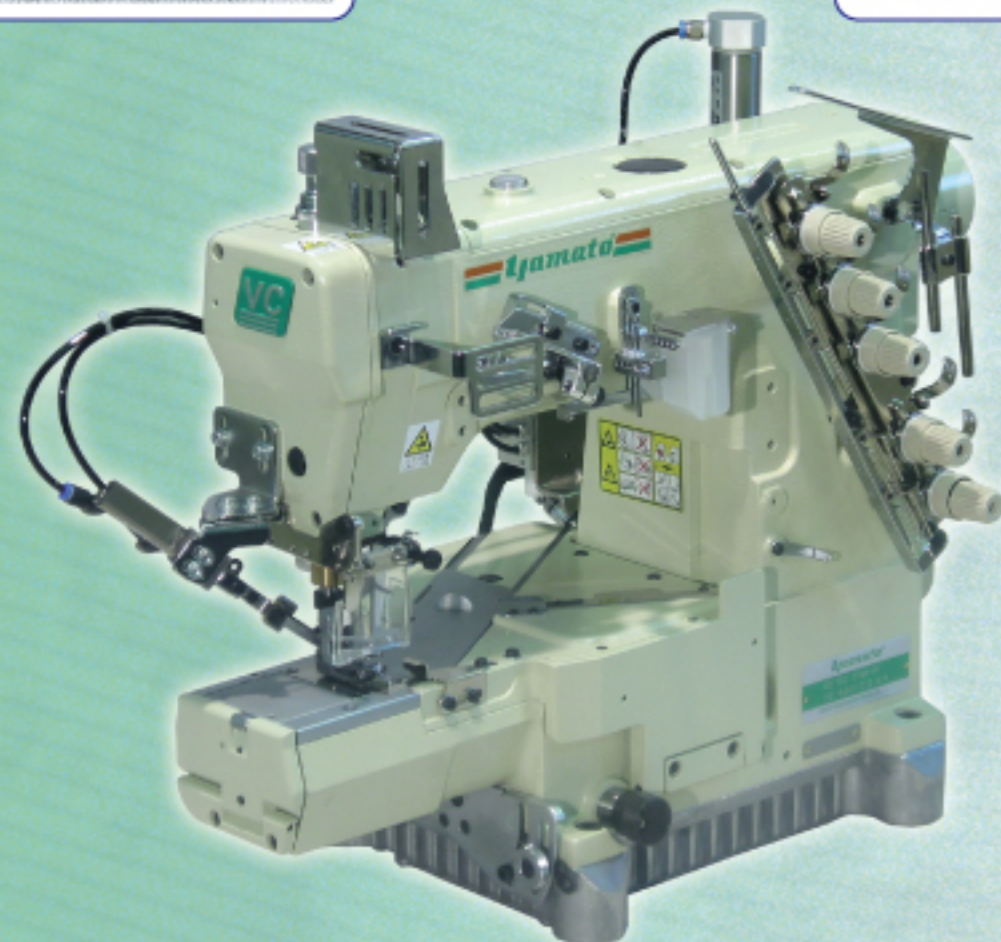

Yamato®

VC1700-8 class

2-3 needles Cylinder Bed Interlock Stitch Machine

■ Numbering on Model

VC1700-156M-8/UT-A34/ST2-A





- ① Symbol of Series
- ② Class No.
- ③ Number of Needle: 7 = 2-3 needle
- ④ Submodel
- ⑤ Top Cover Thread Mechanism: 1 = with Top Cover Thread Mechanism
- ⑥ Needle Distance: 40 = 4.0mm(2 needles), 48 = 4.8mm, 56 = 5.6mm, 64 = 6.4mm
- ⑦ Shape of Stitch Tongue on Stitch Plate
- ⑧ Special Specification
- ⑨ Devices

■ Specification

Model	Seam	Needle	Bob	Stitch	Stitch Length	Stitch Width	Presser Foot	Presser Foot Pressure	Stitch Density	Stitch Length	Stitch Width
VC1700-8		UY128GAS		(4.0) 4.8	1.4~3.6		1.03~12.9	7.5 (MAX)	31	6,000	
VC1713-8		3 (2)	5 (4)	5.6 6.4					31	6,000	

■ Devices

- UT-A□□C : Air operated under thread trimmer
- ST2-AC : Air operated top cover thread trimmer

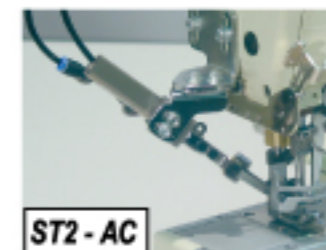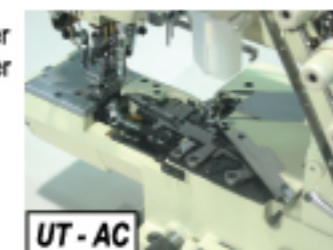

YAMATO SEWING MACHINE MFG. CO., LTD.
<http://www.yamato-sewing.com>

HEAD OFFICE
 4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN
 TEL: +81-6-6364-5621 / FAX: +81-6-6364-7185 / E-mail: export-dept@yamato-sewing.com

YAMATO U.S.A. INC.

TEL: +1-803-548-0334 / FAX: +1-803-548-0405

YAMATO EUROPE GmbH.

TEL: +49-40-355347-0 / FAX: +49-40-354371 / E-mail: sales@yamato.de

YAMATO (HONG KONG) CO., LTD.

TEL: +852-2721-0250 / FAX: +852-2723-0444 / E-mail: yamato@yamato-sewing.com.hk

源興機(香港)有限公司 香港代表处

TEL: +86-789-86231363 / FAX: +86-789-86231362

大和縫紉機(寧波)有限公司

TEL: +86-574-86800518, 86800558 / FAX: +86-574-86800555 / E-mail: market@yamato-china.com

大和縫紉機製造株式会社 青島事務所

TEL: +86-532-85783175 / FAX: +86-532-85783172

大和縫紉機製造株式会社 上海事務所

TEL: +86-21-64400017, 64400018 / FAX: +86-21-64400021

YAMATO SINGAPORE PTE LTD.

TEL: +65-6287-1865 / FAX: +65-6287-1028 / E-mail: sales@yamato-sewing.com.sg

YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE, TIRUPUR MAIN BRANCH

TEL: +91-421-4333701 / FAX: +91-421-4333702 / E-mail: yamato-sewing@airtelbroadband.in

YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE, DELHI BRANCH

TEL: +91-11-41803280 / FAX: +91-11-41803281

YAMATO SINGAPORE PTE LTD., CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA

FAX: +62-21-781-8727

YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE

TEL: +88-02-899-1864 / FAX: +88-02-899-1865

YAMATO MEXICO OFFICE


TEL: +52-55-5764-6090 / FAX: +52-55-5578-1470

THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY

TEL: +84-8-62966067 / FAX: +84-8-38113384


Minimal lubrication with High-Tech parts

The comparison of the friction and amount of lubrication

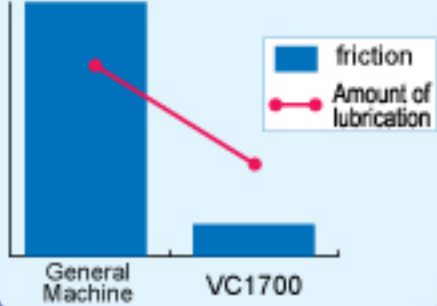


Using Hi-Tech material which gave new material and special processing to reduce friction. Be able to drastically reduce amount of lubrication to needle bar mechanism.

Prevent oil stain!

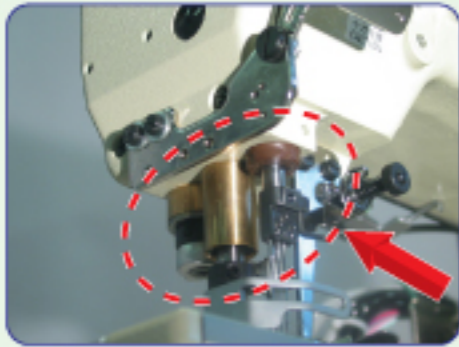

No more oil leakage by oil sealing. Oil sealing is introduced on needle bar, presser bar and spreader bar. Minimum necessary amount of oil at exactly where and when it is needed.


Prevent oil leakage from cylinder!

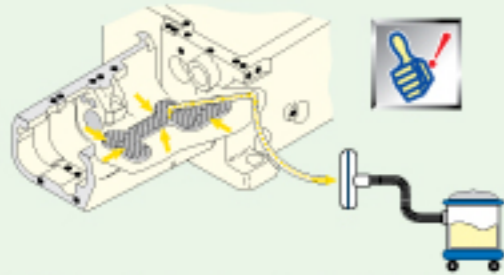

Oil in cylinder is collected forcibly.

Oil in cylinder is collected forcibly. Oil in cylinder is collected forcibly by pump.

Forced lubrication system is introduced

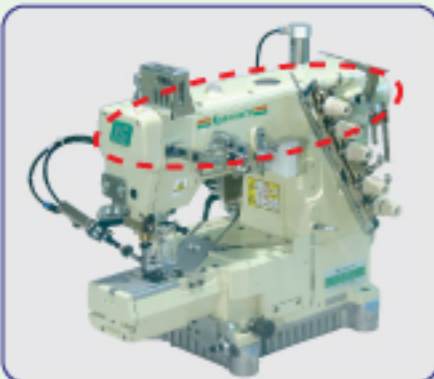


"Forced lubrication system" which pumped machine oil is supplied directly to internal surface of connecting rods through crankshaft. This feature contributes for low running noise.

Soft seam to tight seam...widely support!!



Active Thread Control support wide variety of seams, from soft and elastic seams to standard seams.

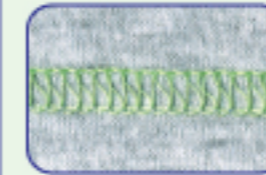


Tightened



Loosened


● Soft seam suitable for microfiber.

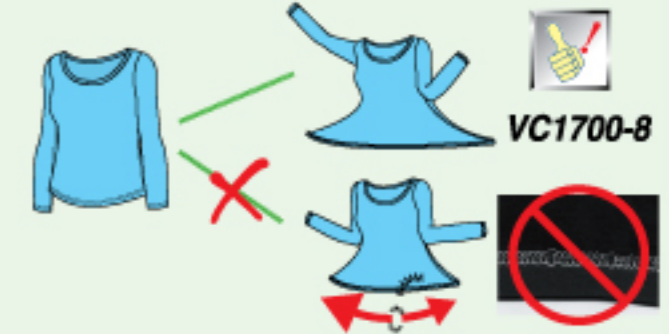


● Tunnel Free Finish



Simple maintenance

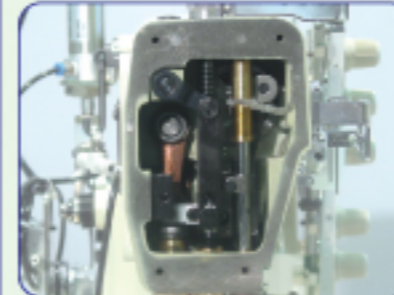

Easily Switchable Needle Bar Stroke (31↔33mm)
Needle bar stroke can be switched from 31mm(standard) to 33mm by simply turning an eccentric pin on the needle bar. This epoch-making system shortens the downtime for conversion to meet extreme change of fabric weight.

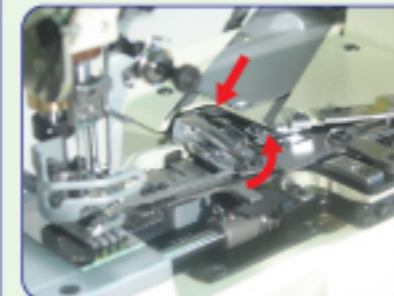

Easy Threading and Trouble Free for Thread Winding around the thread take-up cam
Easy threading by swing-up type looper thread take-up eyelet. The special brush prevents the thread from winding around the looper thread take-up area.



New Foot Lifter Lever Mechanism
The outer lever (similar to the one for overlock machine) enables easy assembly and adjustment of foot lifter without removing top cover.