

Yamato

VE-8F series

Small Cylinder Bed Interlock Stitch Machine

Easy material handling and neat finish is available on YAMATO's small cylinder bed interlock stitch machines.



ISO9001:2008
JQA-QM6412


Yamato

VE-8F series

Small Cylinder Bed Interlock Stitch Machine

Numbering on Model

VE2713-156L-2-T1N-8F/UT-2



- ① **Symbol of Series**
- ② **Class No.**
- ③ **Number of Needle : 7= 2,3 needle**
- ④ **Submodel by Application**
- ⑤ **Top Cover Thread Mechanism :**
1 = without the mechanism
0 = with the mechanism
- ⑥ **Needle Distance :**
48=4.8mm 56=5.6mm 64=6.4mm
- ⑦ **Shape of Stitch Tongue on Stitch Plate:**
M = for medium weight fabrics
L = for light weight fabrics
S = for special specifications
- ⑧ **Special Features**
-2 = Needle stroke: 33mm
-1 = Needle stroke: 31mm
- ⑨ **Covering style**
No indication=Fabric Guide: Non
-T = for covering
-K = for tip over covering
- ⑩ **Feed Layout**
No indication=Feed Layout: Non
- ⑪ **Coarseness of Feed Dogs**
No indication (Standard)
N=1.6mm (Standard)
A=2.5mm (Coarse Mesh)
- ⑫ **Active Thread Control**
-8 = with Active Thread Control
- ⑬ **Device**
UT * = Automatic Under Thread Trimmer
ST * = Automatic Top Cover Thread Trimmer

| Differential Feed Dog | Main Feed Dog |
|-----------------------|---------------|
| 1 = 3 rows | 4 rows |
| 2 = 3 rows | 3 rows |
| 3 = 2 rows | 4 rows |
| 4 = 4 rows | 4 rows |

Submodels & Specifications

| Model | Seam | Needle | Needle Distance | Needle Size | Stitch Length | Stitch Width | Coarseness | Active Thread Control | Device | Speed |
|--------------|------|------------------|-----------------|-------------------|---------------|--------------|------------|-----------------------|--------|-------|
| VE2711(P)-8F | | UY128GAS 3(2) | 5 (4) | 4.8 5.6 6.4 | 1.4-4.2 | | 1.0.8-1.4 | | | 4500 |
| VE2713(P)-8F | | UY128GAS 3(2) | 5 (4) | 5.6 | 1.4-4.2 | | | | | 4500 |

! Specification and appearance on this catalog are subject to change without notice.
For correct handling of products described on this catalog, please read instructions carefully before operation.

YAMATO SEWING MACHINE MFG. CO., LTD.
<http://www.yamato-sewing.com>


HEAD OFFICE
4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN
TEL:+81-6-6364-5621/FAX:+81-6-6364-7185/E-mail:export-dept@yamato-sewing.com

YAMATO U.S.A. INC. TEL:+1-803-548-0334/FAX:+1-803-548-0405
YAMATO EUROPE GmbH TEL:+49-40-355347-0/FAX:+49-40-354371/E-mail:sales@yamato.de
YAMATO (HONG KONG) CO., LTD. TEL:+852-2721-0251/FAX:+852-2723-0444/E-mail:yamato@yamato-sewing.com.hk
Yamato (China) Co., Ltd. TEL:+86-799-86231383/FAX:+86-799-86231362
大和缝纫机(宁波)有限公司 TEL:+86-574-86500518,86800558/FAX:+86-574-86800559/E-mail:marketing@yamato-china.com
大和缝纫机制造株式会社 青森支店 TEL:+86-532-85783175/FAX:+86-532-85783172
大和缝纫机制造株式会社 上海支店 TEL:+86-21-64400017,64400019/FAX:+86-21-64400021
YAMATO SINGAPORE PTE LTD. TEL:+65-6287-1956/FAX:+65-6287-1028/E-mail:sales@yamato-sewing.com.sg
YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, TIRUPUR MAIN BRANCH TEL:+91-421-4333701/FAX:+91-421-4333702/E-mail:yamato-sewing@airtelbroadband.in
YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, DELHI BRANCH TEL:+91-11-41603280/FAX:+91-11-40574881
YAMATO SINGAPORE PTE LTD, CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA FAX:+62-21-781-8727
YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE TEL:+88-02-899-1864/FAX:+88-02-899-1865
YAMATO MEXICO OFFICE TEL:+52-55-5784-0090/FAX:+52-55-5578-1470
THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY TEL:+84-8-62966057/FAX:+84-8-38113384

Circumference of cylinder is 180mm. Both main and differential feed dogs are installed in the small cylinder. Additionally, UT device is equipped.

CYLINDER

Short distance from needle drop point to front of cylinder. Therefore, even if sewing cuffs of sweat shirts or children's cloths, it is easy for the operator to handle fabric.

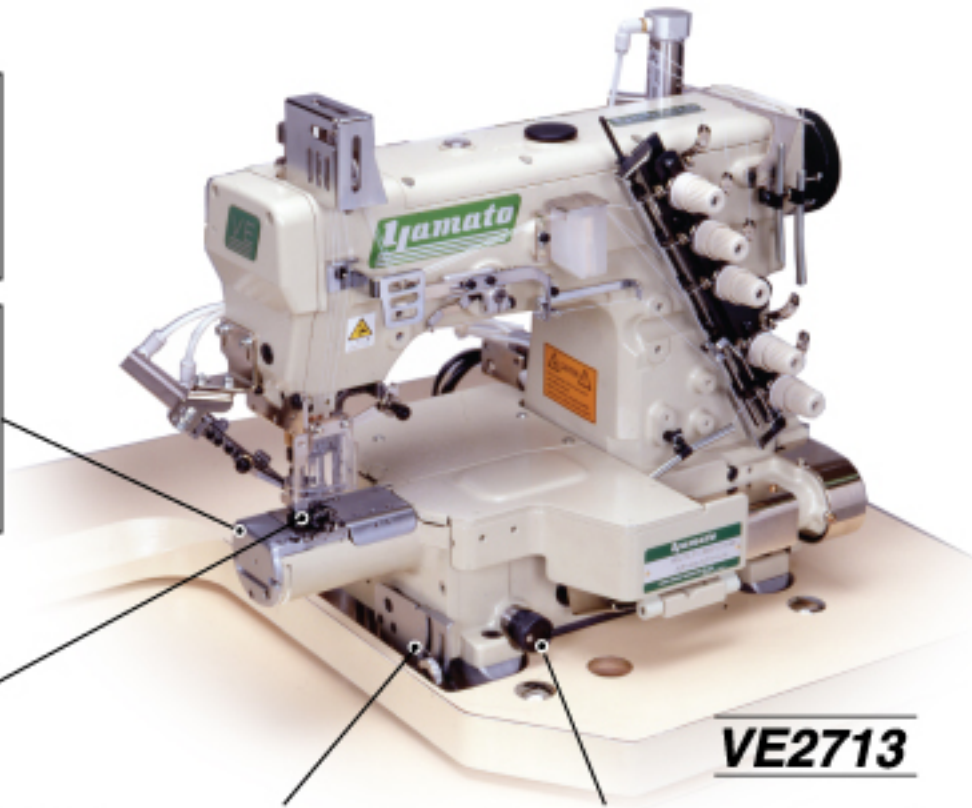

VE2713

Needle guard driving (front & rear) separately from looper holder

NEW NEEDLE GUARD MECHANISM (Patented)

Adjustable vertical position and angle

Stitch length can be quickly and easily adjusted by lever. Stitch condense can be obtained

Fine adjustable stitch length by adjusting knob.

NEW FEED DRIVING MECHANISM (Patented)



VE2713: FOR COVERING




VE2711: FOR HEMMING

Submodels

VE2711 2, 3 Needle Small Cylinder Bed Interlock Stitch Machine for Hemming

This model is applicable for hemming on small tubular articles, such as cuffs of long sleeve shirts and ankles of pants.



VE2713(P) 3 Needle Small Cylinder Bed Interlock Stitch Machine for Covering

The small cylinder machine is applicable for covering on small circular articles, such as cuffs and neckline of sweatshirts, and ankles of sweat pants. Also, thanks to its short cylinder length, little obstruction is worried when covering armholes of raglan sleeve shirts.

VE2713-1□□M-**T1N**-8F

Covering Style

Feed Layout

Coarseness of Feed Dogs



| | | | | | Standard 1.6mm | Coarse Mesh 2.5mm |
|-----|---|---|---|---|----------------|-------------------|
| T1N | ● | | 3 | 4 | ● | |
| T2A | ● | | 3 | 3 | | ● |
| K4N | ● | ● | 4 | 4 | ● | |

Devices

UT Automatic Under Thread Trimmer

ST Automatic Top Cover Thread Trimmer

| | Under Thread Trimmer | Wiper | Foot Lifter | Foot Lifter + Wiper | Top Cover Thread Trimmer | Remarks |
|--------------------------|----------------------|-------|-------------|---------------------|--------------------------|---|
| Air Operated Type | | | | | | |
| UT-A32 | ● | — | — | ● | — | Wiper and foot lifter works at the same time. |
| UT-A34 | ● | ● | ● | — | — | Wiper and foot lifter works independently |
| UT-A34/ST2-A | ● | — | ● | — | ● | |
| Solenoid Type | | | | | | |
| UT-2 | ● | ● | ● | — | — | |
| UT-4 | ● | — | ● | — | — | |
| UT-4/ST2 | ● | — | ● | — | ● | |

Active Thread Control

Active Thread Control support wide variety of seams from soft and elastic seams to tight seams.

