

Ujamoto[®]

ISO9001:2008 Certified, MADE IN JAPAN



VGS SERIES




ISO9001:2008
JQA-QM6412

極 *kiwami*


*The best & must partners for those who are
manufacturing well-engineered garments at
"masterpiece" quality...*

*For evolving manufacturers
dealing with wide variety of items and styles
in order to keep up with Fast Fashion.*

*Here is the Solution Yamato **VGS***

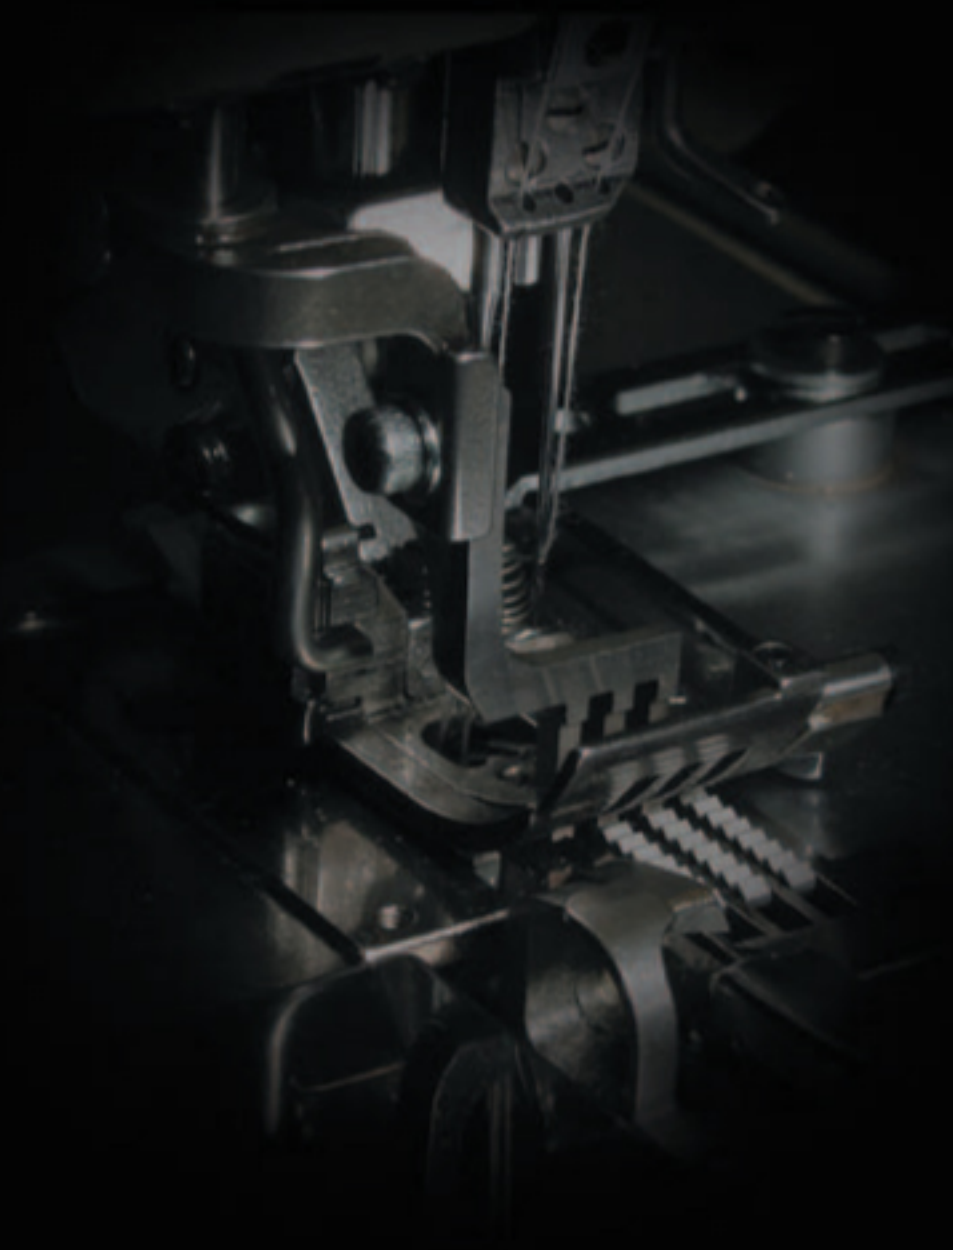

Yamato VGS will release your headache on troubles possibly occur in your Sewing Factory

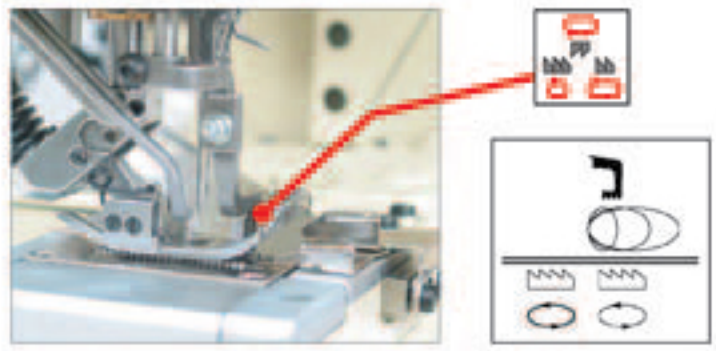


Top-Feed Mechanism

Top Feed Dog always bring top ply of fabric closer to needle drop point at any feed amount. This is because the movement of Yamato Top Feed Dog is rear pivot. Also, Top Feed Dog and Feed Dog Adapter is set at flat faces for easier height adjustment according to thickness of fabric.


Stable Finish

Top Feed Dog eliminates sewing slippage, twisting and distortion of any kinds of fabric for beautiful finish.

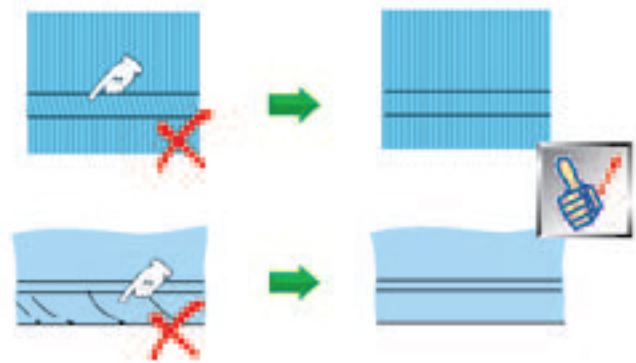

Easier Handling

The position of needle bar driving link is designed higher by 17mm than our conventional machine to keep more space at the left side of needle drop point. This helps you for easier handling.

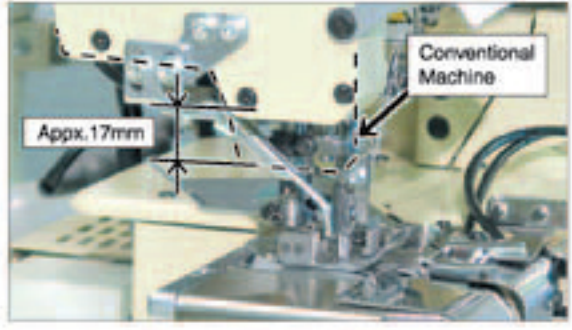

Non-Stain (PAT. P)

Yamato Non-Stain technology will not sacrifice the performance and durability of machines, but keep the machine running smoothly for higher quality of finished garments.




Active Thread Control (PAT. P)


Unlike the conventional way of thread control, which mainly uses tension (resistance) on each thread, Yamato Active Thread Control takes in and/or draws back threads when it is required, and stitch well-balanced seams with minimum necessary tension (resistance) for thread regulation. Wide variety of seams, from soft and elastic seams to standard seams, can be performed by simple and visible adjustment, not by fuzzy adjustment using thread tension devices.



Soft seam suitable for microfiber

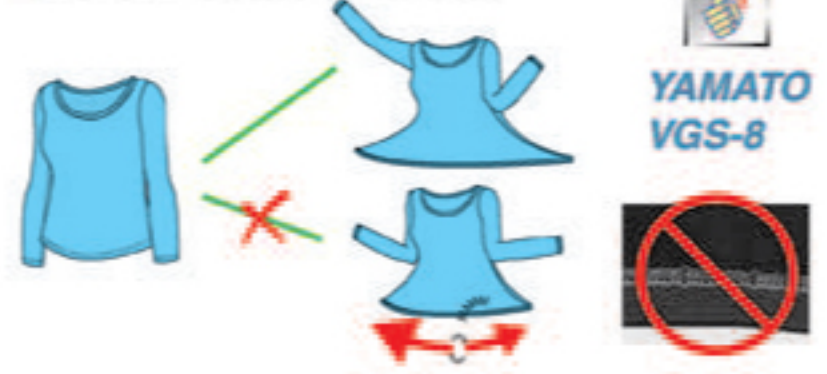

Tunnel Free Finish

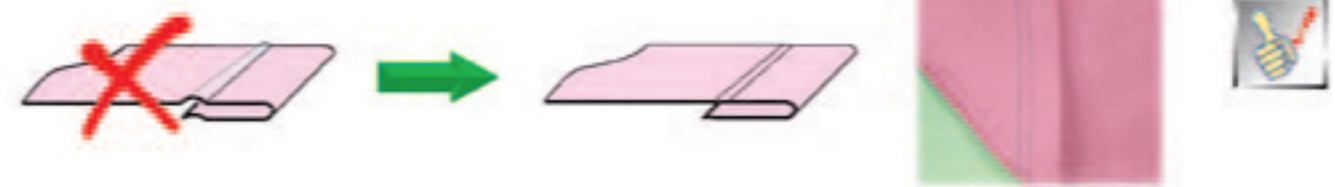

Applicable for wider variety of sewing conditions




VGS 2740

3 Needle 5 Thread Cylinder Bed Interlock Stitch Machine for Hemming, with Top Feeder



Exclusive model for hemming operation equipped with sewing parts

Unique layout of feed dogs for flat and neat finish of edge of hem. Relaxed and stretchable stitch formation.

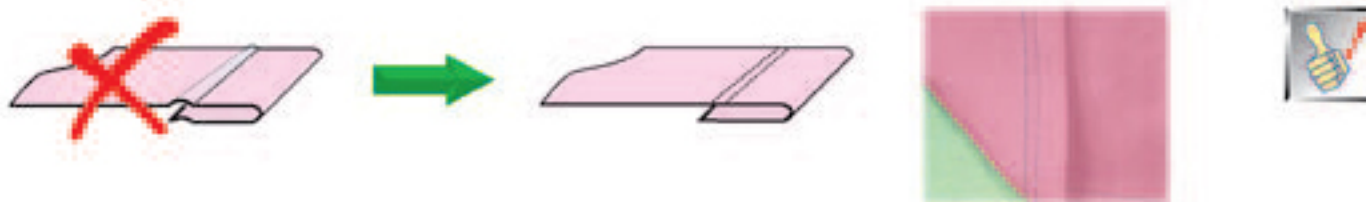


For wide variety of applications

With Yamato Active Thread Control, which controls each sewing thread to form well-balanced stitch with minimum stress, you will be satisfied with finished garments in wide variety of sewing conditions, from soft and elastic seam suitable for microfiber to neatly tightened seam for outer knitwear, with visible adjustment.



VGS 2790


3 Needle 5 Thread Unique Cylinder Bed Interlock Stitch Machine for Covering, with Top Feeder

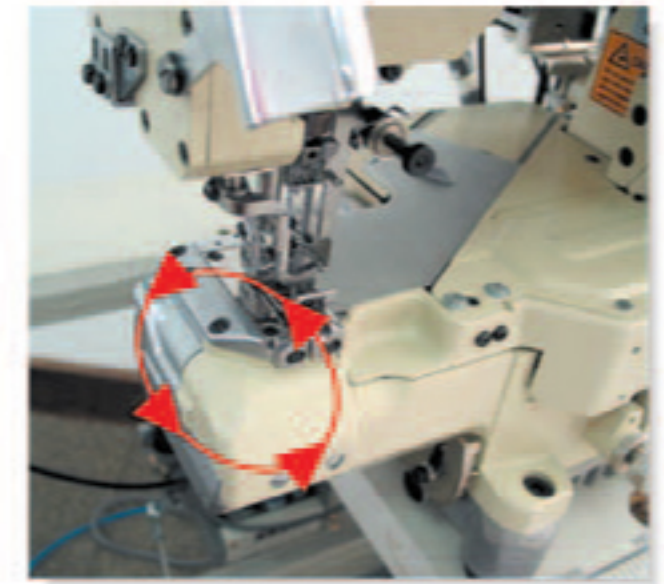

Subclass of VGS series with unique cylinder bed for covering

Smoother handling can be achieved for covering operation on small circular portion such as neckline of sweatshirts, etc. Easier access to internal mechanism than conventional model for easier maintenance.

Improves working environment and easy maintenance

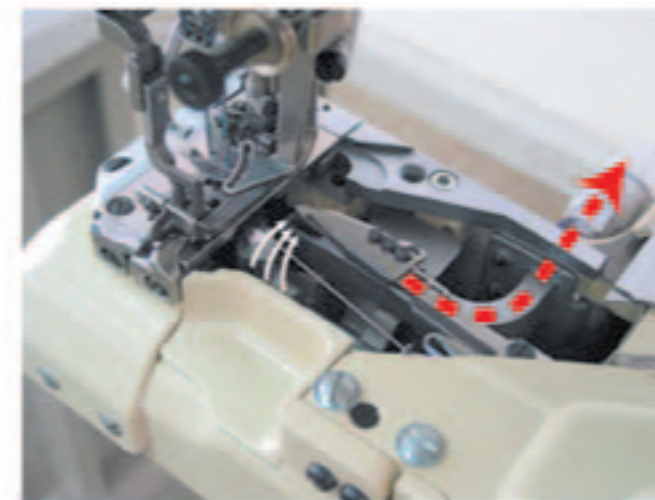


SC25

Blow-in and Suction Type Self Cleaning System

This device blows lint inside sewing cylinder and collects (sucks) it, which contributes decreasing downtime for cleaning. No need to worry about stains on fabric caused by oil-stained lint.

- Applicable for VGS2790 class only.
- This device should be specified when ordering the machine.
- Compressed air or Vacuum dust collector is required for suction of blown lint.


VGS 3721 3 Needle 5 Thread Cylinder Bed Interlock Stitch Machine with Top Feeder, Left Hand Fabric Trimmer

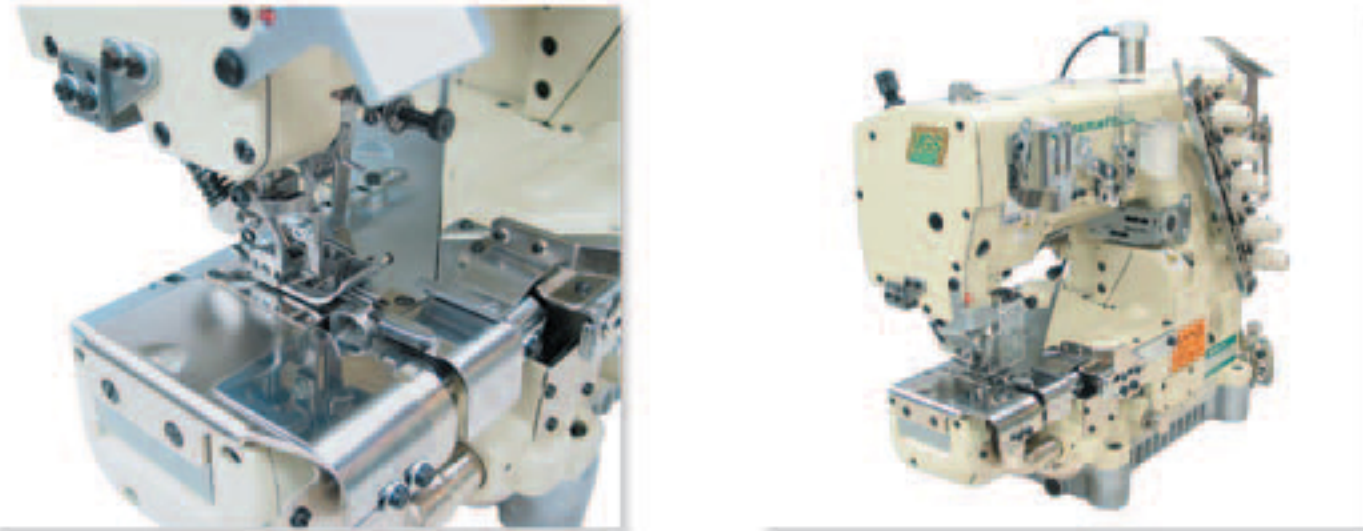


Equipped with fabric trimmer to trim folded edge of hem for uniform finish

Downsized trimmer and newly designed sewing parts ensure smooth operation and stitch-on-stitch overlapping. Also, trimming margin can be held down and waste of material is minimized.

Tunnel Free Finish, Comfortable to wear

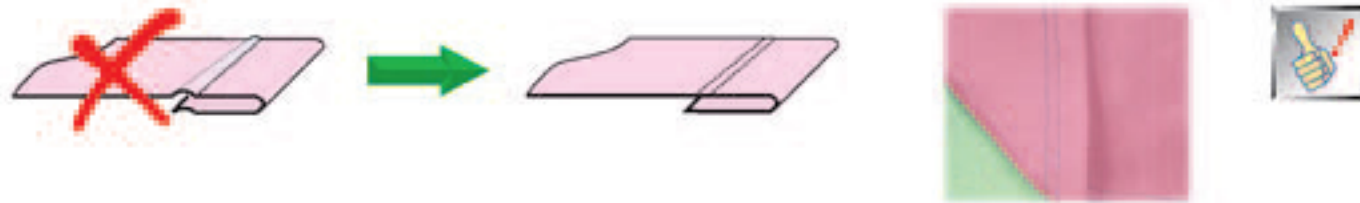

Soft seam suitable for microfiber

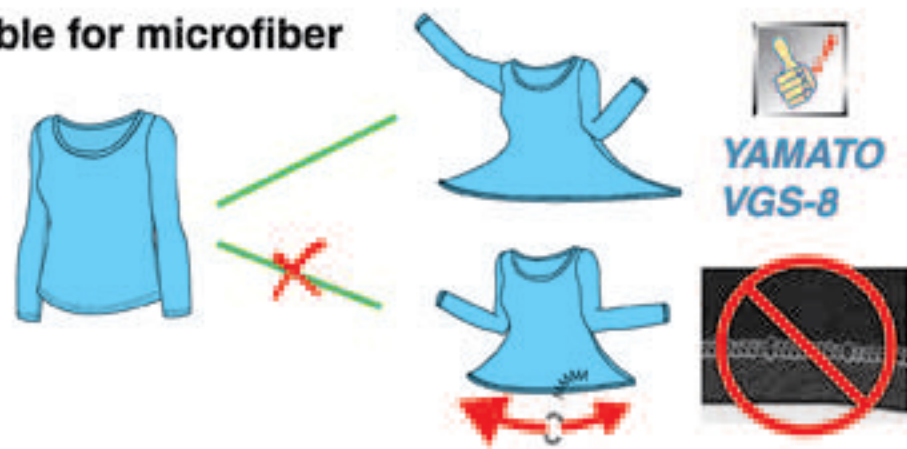

VGS 3721 3 Needle 5 Thread Cylinder Bed Interlock Stitch Machine with Top Feeder, Left Hand Fabric Trimmer


Epoch-Making Versatility of VGS with Left Hand Fabric Trimmer Micro Adjuster



Trimming position is easily adjustable while keeping engagement of knives and is also applicable for different hemming styles with little downtime.

Left Hand Fabric Trim Mechanism (PAT. P)

Movement of fabric trimmer can be cancelled easily when trimming is not necessary. No re-adjustment is required for the next usage. Also, whole trimming mechanism is removable. The machine can be converted into normal cylinder bed machine by exchanging covers and sewing parts.

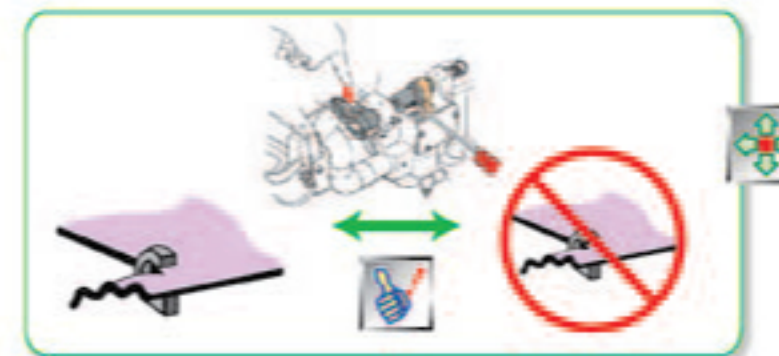

Other Sub Models

Model	Application	Seam	Needle	Presser	Stitch	Speed
VGS2708-8	1 Needle Double Chain Stitch Machine for Top Stitching of Display Tape		UY129GAS 1	2	-	5500
VGS2730-8	3 Needle Interlock Stitch Machine for General Seaming & Hemming		UY129GAS 3(2)	5(4,3)	4.0 4.8 5.6 6.4	5500



Numbering on Model

VGS2740-156S8-8/UT-A34



VGS2740-8 : 3 Needle 5 Thread Interlock Stitch Machine for Hemming

VGS3721-8 : 3 Needle 5 Thread Interlock Stitch Machine, Left Hand Fabric Trimmer

VGS2790-8 : 3 Needle 5 Thread Interlock Stitch Machine for Covering

- ① Symbol of Series ② Class No.
- ③ Number of Needle : 7 = 2,3needle
- ④ Submodel by Application
- ⑤ Top Cover Tread Mechanism : 1 = with Top Cover Thread Mechanism
- ⑥ Needle Distance : 40 = 4.0mm(2 Needle) 48 = 4.8mm 56 = 5.6mm 64 = 6.4mm
- ⑦ Shape of Stitch Tongue on Stitch Plate
- ⑧ with Active Tread Control 8 = Replaceable Stitch Plate Stitch Tongue 8F = Fixed Stitch Plate Stitch Tongue
- ⑨ Device(s)

Specifications

Model	Seam	UY128GAS 3(2)	5(4,3)	4.0 4.8 5.6 6.4	1.4-3.6	1.0:1 (0.8)- 1:1.8	1.6-7	5.5-7	31(33)	5500
VGS2740-8		UY128GAS 3(2)	5(4,3)	4.0 4.8 5.6 6.4	1.4-3.6	1.0:1 (0.8)- 1:1.8	1.6-7	5.5-7	31(33)	5500
VGS3721-8		UY128GAS 3(2)	5(4,3)	4.0 4.8 5.6 6.4	1.4-3.6	1.0:1-1:1.2	1.6-7	5.5-7	31(33)	5500
VGS2790-8		UY128GAS 3(2)	5(4,3)	4.0 4.8 5.6 6.4	1.4-3.6	1.0:1-1:1.2	1.6-5	5.5-7	31(33)	5500

Sewing Parts and Fabric Guides According to Various Seam Style:


VGS2790-1□□M-T1N-8

Covering Style

Feed Layout

Coarseness of Feed Dogs

Covering Style

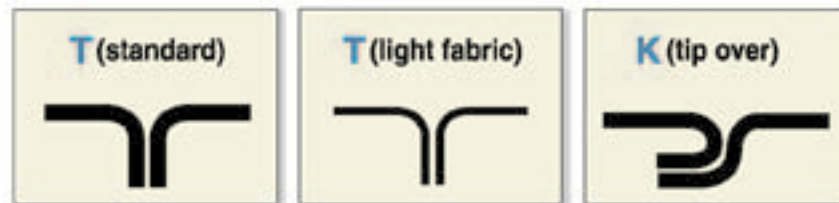

Feed Layout and Coarseness of Feed Dogs



					Standard 1.6mm	Coarse Mesh 2.5mm
T1N	●		3	4	●	
T1A	●		3	4		●
T4N	●		4	4	●	
T4A	●		4	4		●
K1N		●	3	4	●	
K4N		●	4	4	●	

UT Automatic Under Thread Trimmer
ST Automatic Top Cover Thread Trimmer

	Under Thread Trimmer	Foot Lifter	Wiper	Foot Lifter + Wiper	Top Cover Thread Trimmer	Waste Suction	Remarks
Air Operated Type							
UT-A32	●			●			Wiper and foot lifter works at the same time
UT-A34	●	●	●				Wiper and foot lifter works independently
UT-A34F	●	●	●				
UT-A34/ST2-A	●	●			●		
UT-A42	●			●		●	UT-A32 + waste suction for the machines with fabric trimmer
UT-A44	●	●	●			●	UT-A34 + waste suction for the machines with fabric trimmer
UT-A44/ST2-A	●	●			●	●	UT-A34/ST2-A + waste suction for the machines with fabric trimmer
Solenoid Type							
UT-2	●	●	●				
UT-4	●	●					
UT-4/ST2	●	●			●		


UTL-A** Automatic Under Thread Trimmer with Anti-Unraveling Function

UTL-A** is designed so compact as to install the device without changing the design of VGS Short Cylinder Bed. Also, it can be installed even in a machine with UT device. The anti-unraveling function has been proved as effective by Washing Test implemented by an accredited Japan National Laboratory.

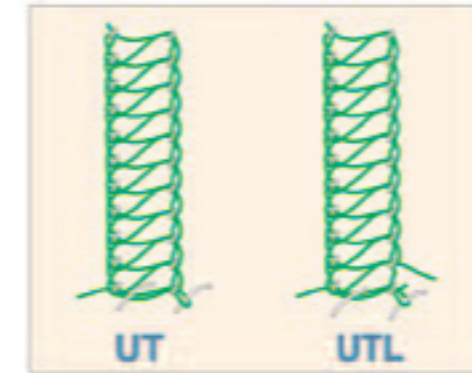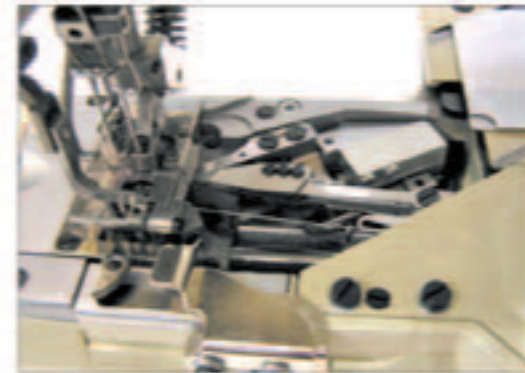


*UTL-A** device requires exclusive motor.

WF11 Walking Presser Foot

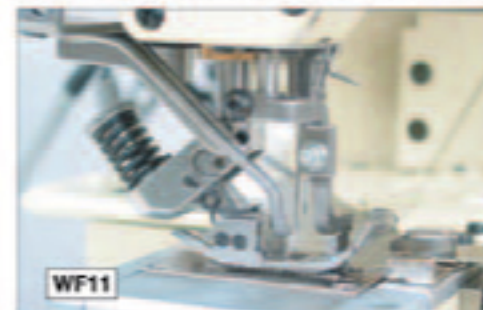

Compact Motor





Specification and appearance on this catalogue are subject to change without notice.
For correct handling of products described on this catalogue, please read instructions carefully before operation.

 **YAMATO SEWING MACHINE MFG. CO., LTD.**
<http://www.yamato-sewing.com>

HEAD OFFICE

4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN
TEL: +81-6-6364-6621 / FAX: +81-6-6364-7185 / E-mail: export-dept@yamato-sewing.com

YAMATO U.S.A. INC.	TEL: +1-803-548-0334 / FAX: +1-803-548-0405
YAMATO EUROPE GmbH.	TEL: +49-40-355347-0 / FAX: +49-40-354371 / E-mail: sales@yamato.de
YAMATO (HONG KONG) CO., LTD.	TEL: +852-2721-0251 / FAX: +852-2723-0444 / E-mail: yamato@yamato-sewing.com.hk
雅清機(香港)有限公司 东莞代表处	TEL: +86-769-86231363 / FAX: +86-769-86231362
大和縫紉機(宁波)有限公司	TEL: +86-574-86800518, 86800558 / FAX: +86-574-86800555 / E-mail: marketing@yamato-china.com
大和縫紉機製造株式會社 青島事務所	TEL: +86-532-85783175 / FAX: +86-532-85783172
大和縫紉機製造株式會社 上海事務所	TEL: +86-21-64400017, 64400018 / FAX: +86-21-64400021
YAMATO SINGAPORE PTE LTD.	TEL: +65-6287-1955 / FAX: +65-6287-1028 / E-mail: sales@yamato-sewing.com.sg
M/S. YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE (TIRUPUR BRANCH)	TEL: +91-421-4333701 / FAX: +91-421-4333702 / E-mail: yamato-sewing@airtelbroadband.in
M/S. YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE (DELHI BRANCH)	TEL: +91-11-41603280 / FAX: +91-11-40574681
YAMATO SINGAPORE PTE LTD., CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA	FAX: +62-21-781-8727
YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE	TEL: +88-02-871-4581, 871-4579 / FAX: +88-02-871-4579
YAMATO MEXICO OFFICE	TEL: +52-55-5764-9090 / FAX: +52-55-5578-1470
THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY	TEL: +84-8-62966057 / FAX: +84-8-38113384